



FL 30

Rotor: Ø 13 m

Lattice towers: 18 / 27 m



Fuhrländer


AKTIENGESELLSCHAFT

The small turbine with the highest reliability

Since the start of wind power use, the FL 30 has proven that Fuhrländer concepts fit up to today. This centrally controlled compact turbine with blade tip brake runs totally uncomplicated on its slim lattice mast in various urban and rural locations. It has a technologically simple

design and generates kilowatt after kilowatt of clean wind power – maintenance-free and discrete. This machine is also suitable for remote locations without demands for the electricity network or the infrastructure – mainly in the market outside Europe.

Power curve FL 30
(theoretical)

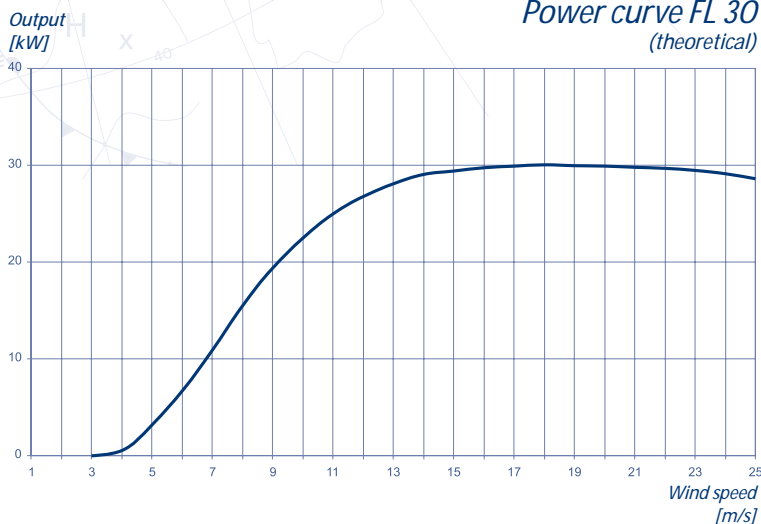

Medium wind speed at hub height [m/s]	FL 30 Annual yield [kWh]
8.5	129'000
8.0	121'000
7.5	111'000
7.0	101'000
6.5	89'000
6.0	77'000
5.5	64'000
5.0	52'000

Subject to technical alterations. Data can vary depending on components.

