



FL 600

Rotor Ø 50 m

Tower heights 50 / 75 m



Fuhrländer

AKTIENGESELLSCHAFT


The compact medium class

With the FL 600 Fuhrländer adds a compact, pitch regulated turbine to its medium class. The single blade adjustment via maintenance-free AC motors and the integrated free-running provide high operating safety. Gear, plummer block and rotor shaft create a compact and reliable unit. The intelligent torque regulation provides a sustained high output performance of the long-life, double driven three-phase alternator.



Output
[kW]

Power curve FL 600
(measured)

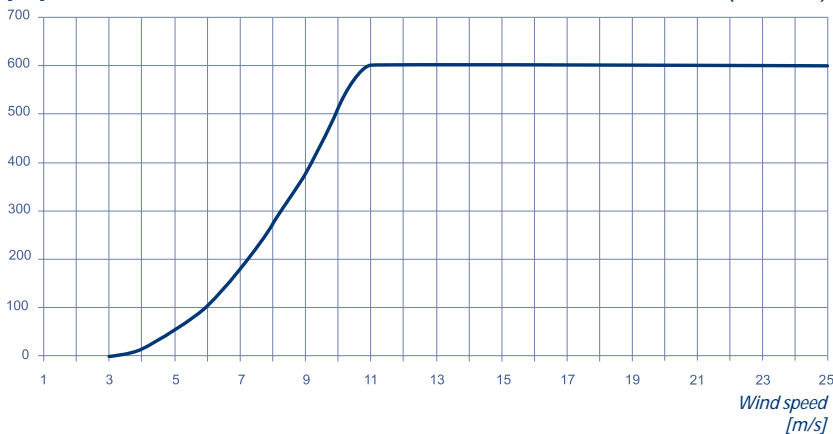

Medium wind speed at hub height [m/s]	FL 600 Annual yield [kWh]
7.5	2'286'000
7.0	2'064'000
6.0	1'553'000
5.0	1'017'000
4.0	536'000